



Expertise Applied | Answers Delivered

8755 W. Higgins Road
Suite 500
Chicago, IL 60631

www.littelfuse.com

Product Change Notice (PCN)

July 24th, 2024

LFPCN# 41531 Product Change Notification for PW Varistor Series


To whom it may concern:

Littelfuse would like to notify you the dimension (Amax and Dmax) change for PW Varistor Series.

This change has no impact to product's original electrical parameters, wire lead pitch, quality, reliability and part numbers. New product samples and qualification test report are available upon request.

This change will be implemented from October 28th, 2024. During the change transition period, customers are expected to receive current and new products until current product inventory in Littelfuse warehouses and distribution channels are depleted.

Please see the affected part number list and dimension change details in the next page, and respond to us by August 26th, 2024 to acknowledge this product change notification. If we do not hear from you, we will expect this change notification has been accepted and no further action is required. Thank you.

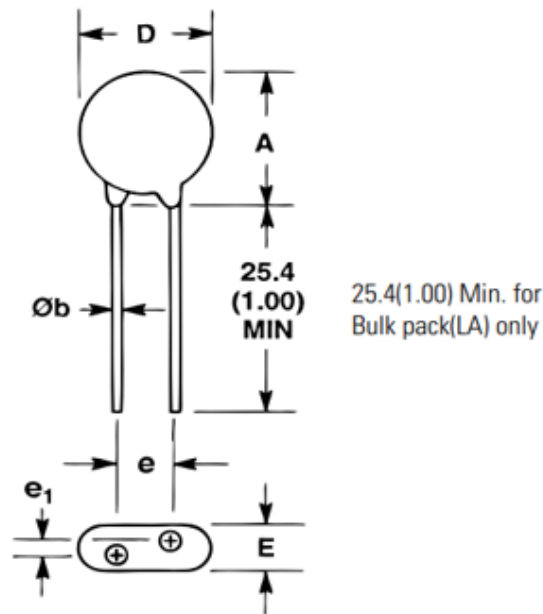

Best Regards,

Amy Chu
Global Product Manager
Littelfuse, Inc.



Expertise Applied | Answers Delivered

8755 W. Higgins Road
Suite 500
Chicago, IL 60631

www.littelfuse.com

Product Change Notice (PCN)

PW Series Part Number	Existing Dimensions(mm)					New Dimensions(mm)				
	E Max	e	e1	Amax	Dmax	E Max	e	e1	Amax	Dmax
V130LA10APW	5.6	7.5 +/-1	1.5~3.5	20.0	17.0	5.6	7.5 +/-1	1.5~3.5	19.0	16.0
V150LA10APW	5.6	7.5 +/-1	1.5~3.5	20.0	17.0	5.6	7.5 +/-1	1.5~3.5	19.0	16.0
V175LA10APW	5.6	7.5 +/-1	1.5~3.5	20.0	17.0	5.6	7.5 +/-1	1.5~3.5	19.0	16.0
V175LC10APW	5.6	7.5 +/-1	1.5~3.5	22.5	17.0	5.6	7.5 +/-1	1.5~3.5	21.5	16.0
V230LA20APW	5.6	7.5 +/-1	1.5~3.5	20.0	17.0	5.6	7.5 +/-1	1.5~3.5	19.0	16.0
V250LA20APW	5.6	7.5 +/-1	1.5~3.5	20.0	17.0	5.6	7.5 +/-1	1.5~3.5	19.0	16.0
V275LA20APW	5.6	7.5 +/-1	1.5~3.5	20.0	17.0	5.6	7.5 +/-1	1.5~3.5	19.0	16.0
V275LA20APWX3597	5.6	7.5 +/-1	1.5~3.5	20.0	17.0	5.6	7.5 +/-1	1.5~3.5	19.0	16.0
V300LA20APW	5.6	7.5 +/-1	1.5~3.5	20.0	17.0	5.6	7.5 +/-1	1.5~3.5	19.0	16.0
V300LA20APWX3597	5.6	7.5 +/-1	1.5~3.5	20.0	17.0	5.6	7.5 +/-1	1.5~3.5	19.0	16.0
V320LA20APW	5.6	7.5 +/-1	1.5~3.5	20.0	17.0	5.6	7.5 +/-1	1.5~3.5	19.0	16.0
V385LA20APW	7.3	7.5 +/-1	2.5~5.5	20.5	17.0	7.3	7.5 +/-1	2.5~5.5	19.5	16.0
V385LC20APW	7.3	7.5 +/-1	2.5~5.5	22.5	17.0	7.3	7.5 +/-1	2.5~5.5	21.5	16.0
V385LC20APWX3749	7.3	7.5 +/-1	2.5~5.5	22.5	17.0	7.3	7.5 +/-1	2.5~5.5	21.5	16.0
V420LA20APW	7.3	7.5 +/-1	2.5~5.5	20.5	17.0	7.3	7.5 +/-1	2.5~5.5	19.5	16.0
V460LA20APW	7.3	7.5 +/-1	2.5~5.5	20.5	17.0	7.3	7.5 +/-1	2.5~5.5	19.5	16.0
V510LA40APW	7.3	7.5 +/-1	2.5~5.5	20.5	17.0	7.3	7.5 +/-1	2.5~5.5	19.5	16.0
V510LA40APWX3514	7.3	7.5 +/-1	2.5~5.5	20.5	17.0	7.3	7.5 +/-1	2.5~5.5	19.5	16.0
V510LS40APW	7.3	7.5 +/-1	2.5~5.5	20.5	17.0	7.3	7.5 +/-1	2.5~5.5	19.5	16.0
V510LT40APW	7.3	7.5 +/-1	2.5~5.5	22.5	17.0	7.3	7.5 +/-1	2.5~5.5	21.5	16.0
V575LA40APW	8.3	7.5 +/-1	2.5~5.5	20.5	17.0	8.3	7.5 +/-1	2.5~5.5	19.5	16.0
V575LA40APWX3514	8.3	7.5 +/-1	2.5~5.5	20.5	17.0	8.3	7.5 +/-1	2.5~5.5	19.5	16.0
V625LA40APW	8.3	7.5 +/-1	2.5~5.5	20.5	17.0	8.3	7.5 +/-1	2.5~5.5	19.5	16.0
V625LA40APWX3514	8.3	7.5 +/-1	2.5~5.5	20.5	17.0	8.3	7.5 +/-1	2.5~5.5	19.5	16.0
V680LA80APW	8.3	7.5 +/-1	2.5~5.5	20.5	17.0	8.3	7.5 +/-1	2.5~5.5	19.5	16.0
V1000LA80APW	10.8	7.5 +/-1	2.5~5.5	20.5	17.0	10.8	7.5 +/-1	2.5~5.5	19.5	16.0
V130LA20APW	5.6	7.5 +/-1	1.5~3.5	26.5	23.0	5.6	7.5 +/-1	1.5~3.5	24.5	21.0
V150LA20APW	5.6	7.5 +/-1	1.5~3.5	26.5	23.0	5.6	7.5 +/-1	1.5~3.5	24.5	21.0
V175LA20APW	5.6	7.5 +/-1	1.5~3.5	26.5	23.0	5.6	7.5 +/-1	1.5~3.5	24.5	21.0
V230LA40APW	5.6	7.5 +/-1	1.5~3.5	26.5	23.0	5.6	7.5 +/-1	1.5~3.5	24.5	21.0
V250LA40APW	5.6	7.5 +/-1	1.5~3.5	26.5	23.0	5.6	7.5 +/-1	1.5~3.5	24.5	21.0
V250LA40BPW	5.6	7.5 +/-1	1.5~3.5	26.5	23.0	5.6	7.5 +/-1	1.5~3.5	24.5	21.0
V275LA40APW	5.6	7.5 +/-1	1.5~3.5	26.5	23.0	5.6	7.5 +/-1	1.5~3.5	24.5	21.0
V275LA40BPW	5.6	7.5 +/-1	1.5~3.5	26.5	23.0	5.6	7.5 +/-1	1.5~3.5	24.5	21.0
V275LA40BPWX3597	5.6	7.5 +/-1	1.5~3.5	26.5	23.0	5.6	7.5 +/-1	1.5~3.5	24.5	21.0
V300LA40APW	5.6	7.5 +/-1	1.5~3.5	26.5	23.0	5.6	7.5 +/-1	1.5~3.5	24.5	21.0
V320LA40BPW	5.6	7.5 +/-1	1.5~3.5	26.5	23.0	5.6	7.5 +/-1	1.5~3.5	24.5	21.0
V385LA40BPW	7.3	7.5 +/-1	2.5~5.5	28.0	23.0	7.3	7.5 +/-1	2.5~5.5	26.0	21.0
V420LA40BPW	7.3	7.5 +/-1	2.5~5.5	28.0	23.0	7.3	7.5 +/-1	2.5~5.5	26.0	21.0
V420LA40BPWX3411	7.3	7.5 +/-1	2.5~5.5	28.0	23.0	7.3	7.5 +/-1	2.5~5.5	26.0	21.0
V420LC40BPWX3411	7.3	7.5 +/-1	2.5~5.5	29.0	23.0	7.3	7.5 +/-1	2.5~5.5	27.0	21.0
V440LA40APW	7.3	7.5 +/-1	2.5~5.5	28.0	23.0	7.3	7.5 +/-1	2.5~5.5	26.0	21.0
V460LA40BPW	7.3	7.5 +/-1	2.5~5.5	28.0	23.0	7.3	7.5 +/-1	2.5~5.5	26.0	21.0
V480LA80BPW	7.3	7.5 +/-1	2.5~5.5	28.0	23.0	7.3	7.5 +/-1	2.5~5.5	26.0	21.0
V510LA80BPW	7.3	7.5 +/-1	2.5~5.5	28.0	23.0	7.3	7.5 +/-1	2.5~5.5	26.0	21.0
V510LA80BPWX10	7.3	7.5 +/-1	2.5~5.5	28.0	23.0	7.3	7.5 +/-1	2.5~5.5	26.0	21.0
V510LS80BPW	7.3	7.5 +/-1	2.5~5.5	28.0	23.0	7.3	7.5 +/-1	2.5~5.5	26.0	21.0
V510LT80BPW	7.3	7.5 +/-1	2.5~5.5	29.0	23.0	7.3	7.5 +/-1	2.5~5.5	27.0	21.0
V575LA80BPW	8.3	7.5 +/-1	2.5~5.5	28.0	23.0	8.3	7.5 +/-1	2.5~5.5	26.0	21.0
V625LA80BPW	8.3	7.5 +/-1	2.5~5.5	28.0	23.0	8.3	7.5 +/-1	2.5~5.5	26.0	21.0
V680LA100BPW	8.3	7.5 +/-1	2.5~5.5	28.0	23.0	8.3	7.5 +/-1	2.5~5.5	26.0	21.0